




GERAN®




CONE85-230V




CONE55-230V




HEPTA75-230V




CUBE75-230V





CUBE55-230V




ARCO75-230V




ARCO55-230V

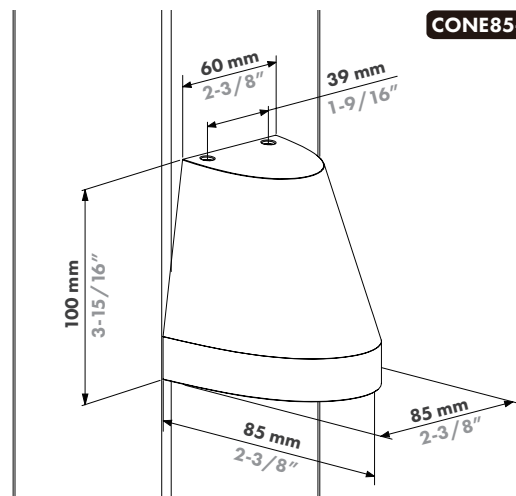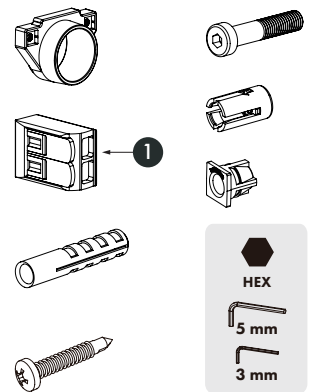


CONE85-230V

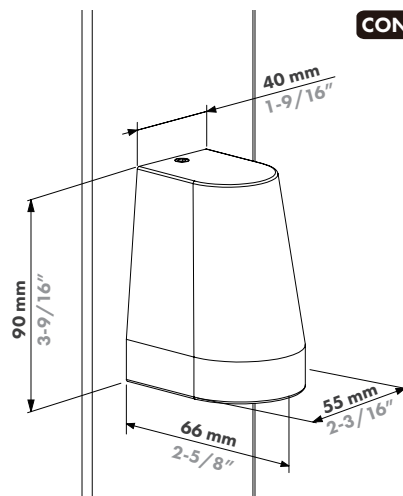


CONE55-230V

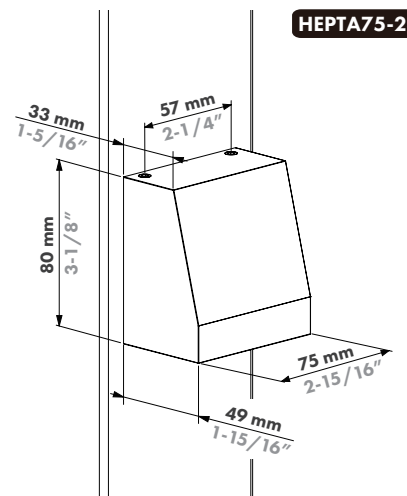


HEPTA75-230V

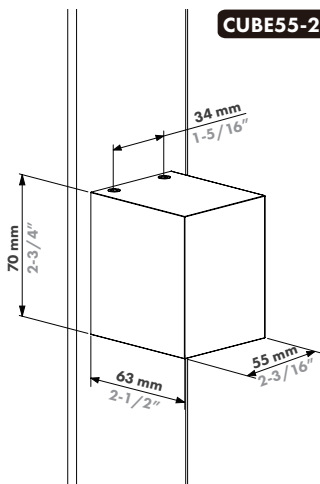


CUBE55-230V

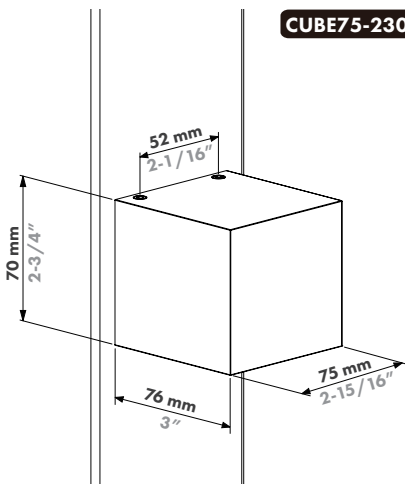










CUBE75-230V






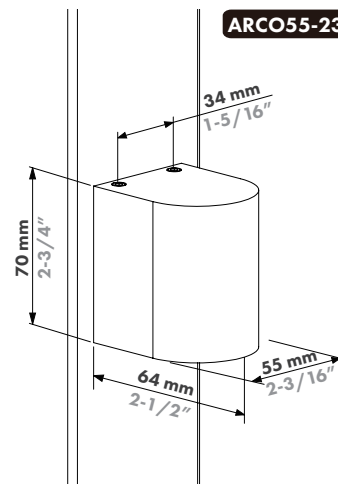


ARCO55-230V

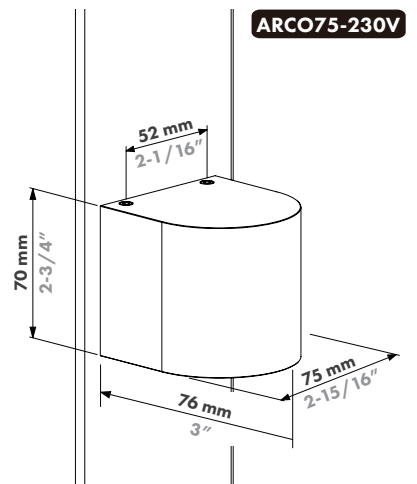

ARCO75-230V

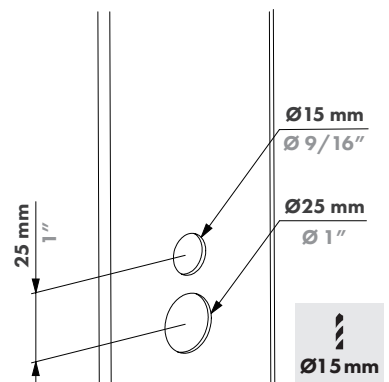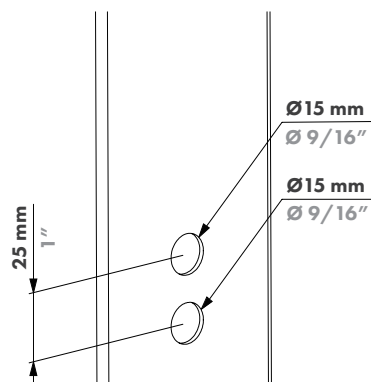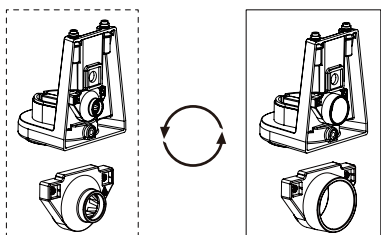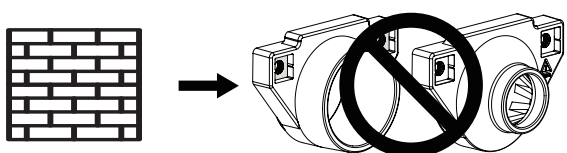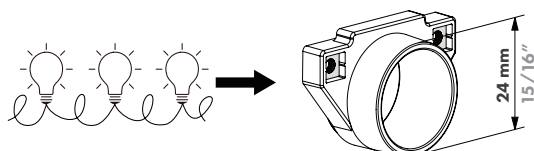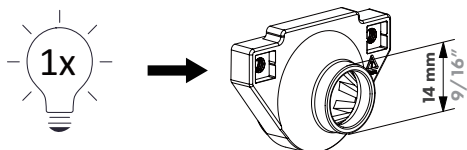

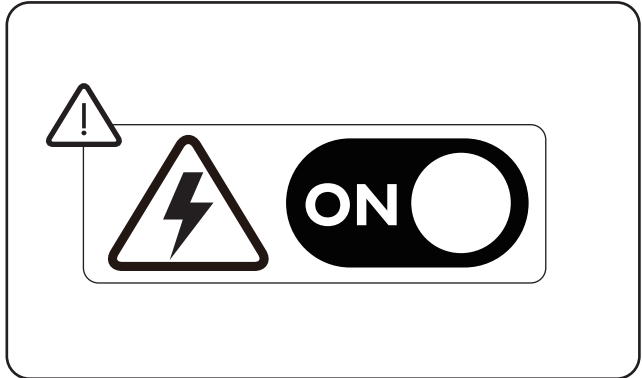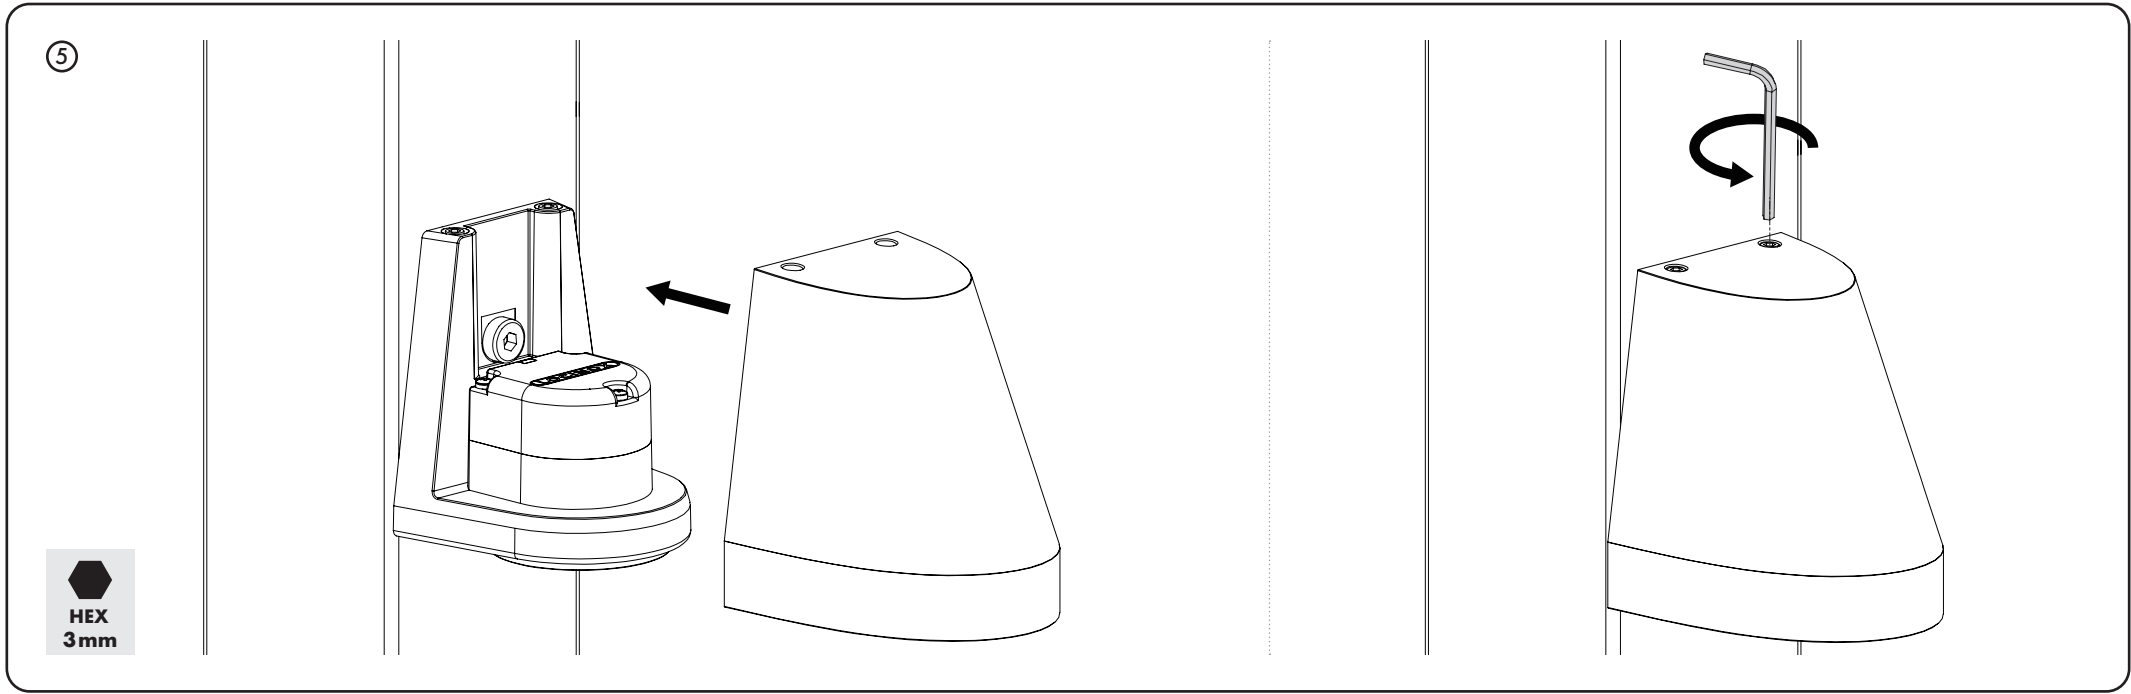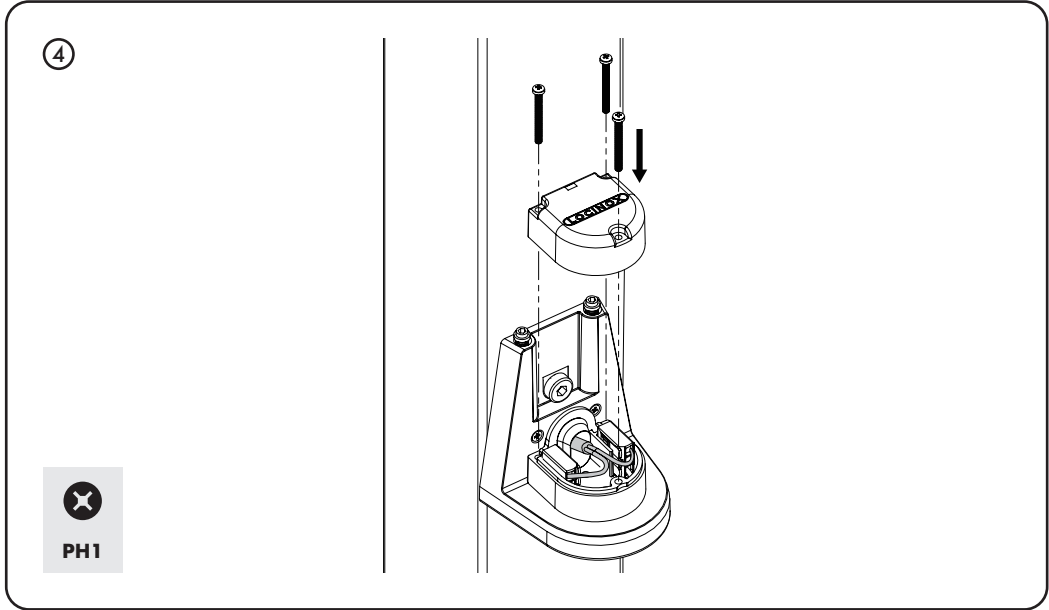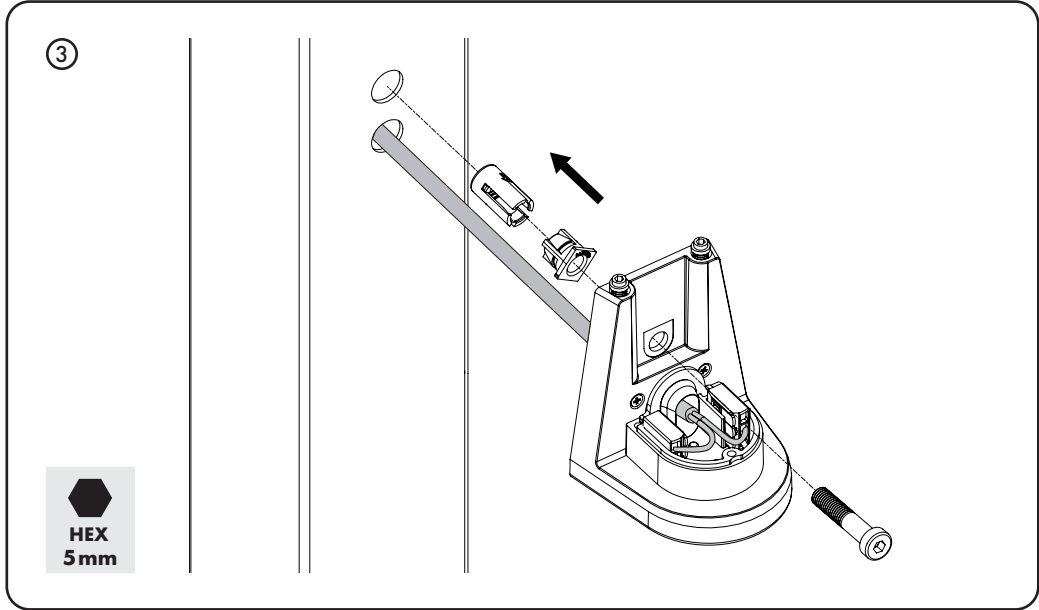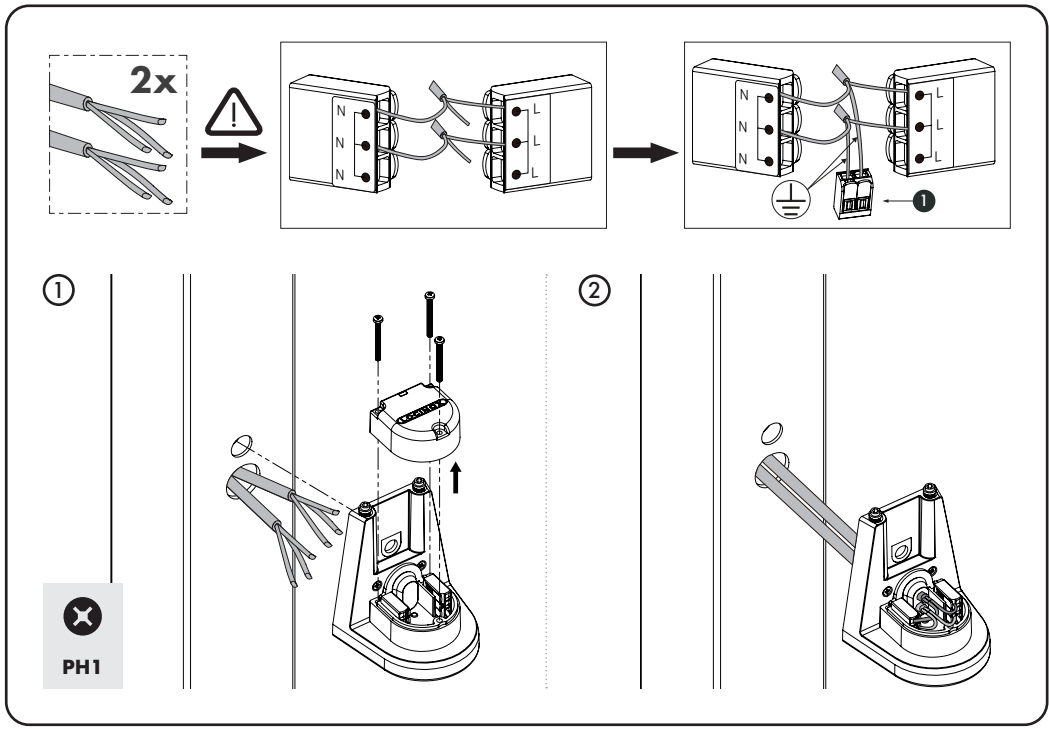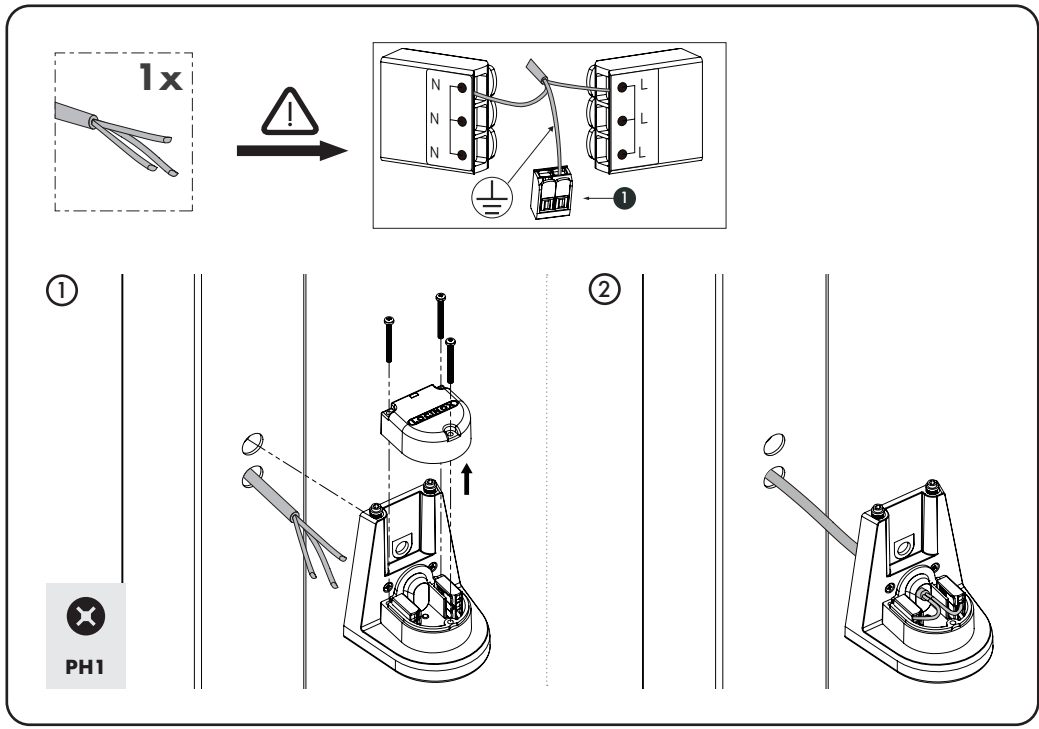

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Input voltage: 220-240V
Input current: 22mA
Power: Max.4.6W
Power factor: >0.85
Light output: 300LUMEN

Safety class II
Protection class IP65
Impact strength IK06
Colour temperature: 2700K
Maximum number of interconnected luminaires: 12pcs